

Quick Installation Guide

TGPS-9084GT-M12 Series




EN50155 12-port managed
Gigabit PoE Ethernet switch

Introduction

The **TGPS-9084GT-M12 series** is a managed Gigabit Ethernet switch with 8 Gigabit PoE-enabled ports and 4 Gigabit non-PoE ports in M12 connector. The series consists of -BP2 models (TGPS-9084GT-M12-BP2) and non-BP2 models (TGPS-9084GT-M12). The non-PoE ports of **TGPS-9084GT-M12-BP2** act as two sets of bypass ports to ensure constant network connectivity when power outage or node failure occurs. The switch supports various Ethernet redundancy protocols such as O-Ring (recovery time < 30ms over 250 units of connection), Open-Ring, O-Chain, MRP and MSTP (RSTP/STP compatible) to protect your mission-critical applications from network interruptions or temporary malfunctions. With EN50155 compliance and M12 connectors, the device is a perfect choice for rolling stock applications.

Package Contents





The device is shipped with the following items. If any of these items is missing or damaged, please contact your customer service representative for assistance.

Contents	Pictures	Number
TGPS-9084GT-M12/ TGPS-9084GT-M12-24V/ TGPS-9084GT-M12-BP2/ TGPS-9084GT-M12-BP2-24V		1
CD		1
QIG		1


Preparation

Before you begin installing the device, make sure you have all of the package contents available and a PC with Microsoft Internet Explorer 6.0 or later, for using web-based system management tools.

Safety & Warnings


-  **Elevated Operating Ambient:** If installed in a closed environment, make sure the operating ambient temperature is compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer.
-  **Reduced Air Flow:** Make sure the amount of air flow required for safe operation of the equipment is not compromised during installation.
-  **Mechanical Loading:** Make sure the mounting of the equipment is not in a hazardous condition due to uneven mechanical loading.
-  **Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

Dimension

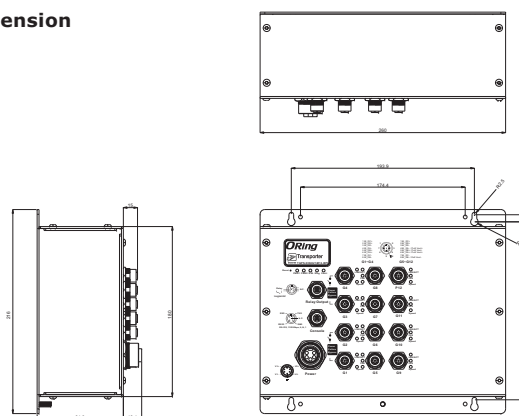

Panel Layouts

Front View

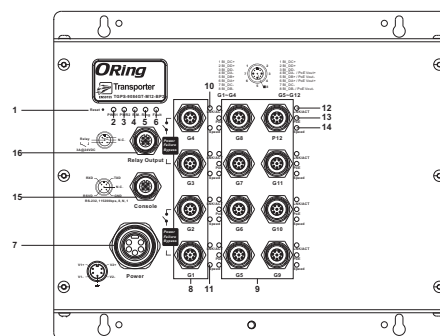


1. Reset button
2. Power1 status LED
3. Power2 status LED
4. R.M. status LED
5. Ring status LED
6. Fault LED
7. Power connector
8. Non-PoE Gigabit Ethernet ports (with bypass for -BP2 model)
9. PoE-enabled Gigabit Ethernet ports
10. Link/ACT LED for non-PoE Gigabit ports
11. Speed LED for non-PoE Gigabit ports
12. Link/ACT LED for PoE-enabled Gigabit ports
13. PoE indicator for PoE-enabled Gigabit ports
14. Speed LED for PoE-enabled Gigabit ports
15. Console port
16. Relay output port

Installation

Wall-mount

The device can be fixed to the wall. Follow the steps below to install the device on the wall.

- Step 1:** Hold the device upright against the wall
Step 2: Insert four screws through the large opening of the keyhole-shaped apertures at the top and bottom of the unit and fasten the screws to the wall with a screwdriver.
Step 3: Slide the device downwards and tighten the four screws for added stability.



Instead of screwing the screws in all the way, it is advised to leave a space of about 2mm to allow room for sliding the switch between the wall and the screws.

Wiring

For pin assignments of power, console and relay output ports, please refer to the following tables.

Grounding

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the grounding pin on the power connector to the grounding surface prior to connecting devices.

Power port pinouts

The device supports two sets of power supplies and uses the M23 5-pin female connector on the front panel for dual power inputs.

- Step 1:** Insert a power cable to the power connector on the device.
Step 2: Rotate the outer ring of the cable connector until a snug fit is achieved. Make sure the connection is tight.



Console port pinouts



Relay output port pinouts

The switch uses the M12 A-coded 5-pin female connector on the front panel for relay output. Use a cable with an M12 A-coded 5-pin male connector to connect the relay. The relay contacts will detect user-configured events and form an close circuit when an event is triggered.



Network Connection

The switch has eight 10/100/1000Base-T(X) PoE and four 10/100/1000Base-T(X) non-PoE Ethernet ports in the form of M12 connector. Depending on the link type, the switch uses CAT 3, 4, 5, 5e UTP cables to connect to network devices (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	8-pin female M12 A-coding connector
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	8-pin female M12 A-coding connector
1000BASE-T	Cat. 5e/Cat. 5e 100-ohm UTP	UTP 100 m (328 ft)	8-pin female M12 A-coding connector

For pin assignments of the Ethernet ports, please refer to the following tables.



8-Pin Gigabit Non-PoE Port Definition	
PIN	Definition
1	BI_DC+
2	BI_DD+
3	BI_DD-
4	BI_DA-
5	BI_DB+
6	BI_DA+
7	BI_DC-
8	BI_DB-

8-Pin Gigabit PoE Port Definition	
PIN	Definition
1	BI_DC+
2	BI_DD+
3	BI_DD-
4	BI_DA- with PoE Vout+
5	BI_DB+ with PoE Vout-
6	BI_DA+ with PoE Vout+
7	BI_DC-
8	BI_DB- with PoE Vout-


Configurations

After installing the switch and connecting cables, the green power LED should turn on. Please refer to the following tablet for LED indication.


LED	Color	Status	Description
PW1	Green	On	DC power module 1 activated
PW2	Green	On	DC power module 2 activated
RM	Green	On	Device operating in Ring Master mode
Ring	Green	On	Ring enabled
		Blinking	Ring structure is broken
Fault	Amber	On	Errors occur (i.e. power failure or port malfunctioning)
10/100/1000Base-T(X) P.S.E Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
PoE	Green	On	Power supplied over Ethernet
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps
10/100/1000Base-T(X) Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps

Follow the steps below to log in and access the system:


1. Launch the Internet Explorer and type in IP address of the device. The default static IP address is **192.168.10.1**



2. Log in with default user name and password (both are **admin**).

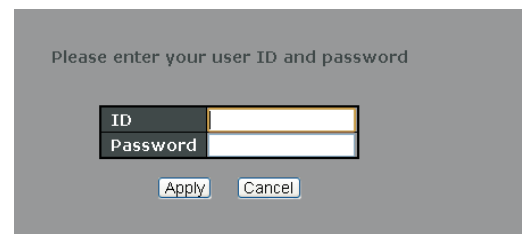

3. After logging in, you should see the following screen. For more information on configurations, please refer to the user manual. For information on operating the device using ORing's Open-Vision management utility, please go to ORing website.

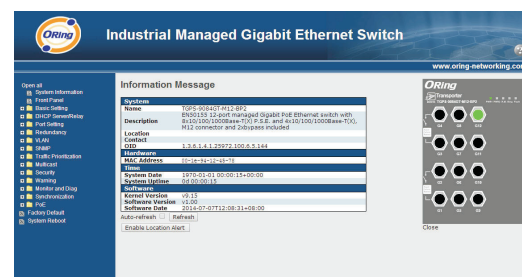

Resetting

To restore the device configurations back to the factory defaults, press the **Reset** button for a few seconds. Once the power indicator starts to flash, release the button. The device will then reboot and return to factory defaults.

Specifications

ORing Switch Model	TGPS-9084GT-M12	TGPS-9084GT-M12-24V	TGPS-9084GT-M12-BP2	TGPS-9084GT-M12-BP2-24V
Physical Ports				
10/100/1000 Base-T(X) Ports in M12 Auto MDI/MDIX with P.S.E.	8 x M12 connector (8 pin A-coding)			
10/100/1000Base-T(X) ports in M12	4 x M12 connector (8-pin A-coding)	4 x M12 connector (8-pin A-coding with 2 x bypass function included)		
Technology				
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3at PoE specification (up to 30 Watts per port for P.S.E.)			
MAC Table	8K			
Priority Queues	8			
Processing	Store-and-Forward			
Switch Properties	Switching latency: 7 us Switching bandwidth: 24 Gbps Max. Number of Available VLANs: 256 IGMP multicast groups: 128 for each VLA Port rate limiting: User Define			
Jumbo frame	Up to 9.6K Bytes			
Security Features	Device Binding security feature Enable/disable ports, MAC based port security Port based network access control (802.1x) VLAN (802.1Q) to segregate and secure network traffic Radius centralized password management SNMP v1/v2c/v3 encrypted authentication and access security Https / SSH enhance network security			
Software Features	STP/RSTP/MSTP (IEEE 802.1D/w/s) Redundant Ring (O-Ring) with recovery time less than 30ms over 250units TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging and GVRP supported IGMP Snooping for multicast filtering IP based bandwidth management Application based QoS management DOS/DDOS auto prevention Port configuration, status, statistics, monitoring, security SNTP for synchronizing of clocks over network DHCP Server / Client support SMTP Client Modbus TCP			
Warning / Monitoring System	Relay output for fault event alarming Syslog server / client to record and view events Include SMTP for event warning notification via email Event selection support			
RS-232 Serial Console Port	RS-232 in M12 (5-pin M12 A-coding) connector with console cable. 115200bps, 8, N, 1			
Fault Contact				
Relay	Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin M12 A-coding)			
Power				
Redundant Input Power	Dual DC inputs. 50~57VDC on 5-pin M23 connector	Dual DC inputs. 24 (12~57) VDC on 5-pin M23 connector	Dual DC inputs. 50~57VDC on 5-pin M23 connector	Dual DC inputs. 24 (12~57) VDC on 5-pin M23 connector
Power Consumption(Typ.)	18 Watts (power consumption of P.S.E. is not included)	23 Watts (power consumption of P.S.E. is not included)	18 Watts (power consumption of P.S.E. is not included)	23 Watts (power consumption of P.S.E. is not included)
PoE Output Power	240 Watts	60 Watts (12~24 VDC) 120 Watts (24~57 VDC)	240 Watts	60 Watts (12~24 VDC) 120 Watts (24~57 VDC)

Overload Current Protection	Present			
Reverse Polarity Protection	Present			
Physical Characteristic				
Enclosure	IP-30			
Dimension (W x D x H)	260(W) x 91.6(D) x 216(H) mm (10.24 x 3.60 x 8.50 inch.)			
Weight (g)	2240 g	2356 g	2262 g	2378 g
Environmental				
Storage Temperature	-40 to 85°C (-40 to 185°F)			
Operating Temperature	-40 to 70°C (-40 to 158°F)			
Operating Humidity	5% to 95% Non-condensing			
Regulatory Approvals				
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)			
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11			
Shock	IEC60068-2-27			
Free Fall	IEC60068-2-32			
Vibration	IEC60068-2-6			
Safety	EN60950-1			
Warranty	5 years			

Copyright© 2014 ORing
All rights reserved.



ORing Industrial Networking Corp.
TEL: +886-2-2218-1066 Website: www.oring-networking.com
FAX: +886-2-2218-1014 E-mail: support@oring-networking.com