



2.1.2 RTV-E4 Extension board of RTV-24

2.1.2.1 RTV-E4 PCB Outline Drawing

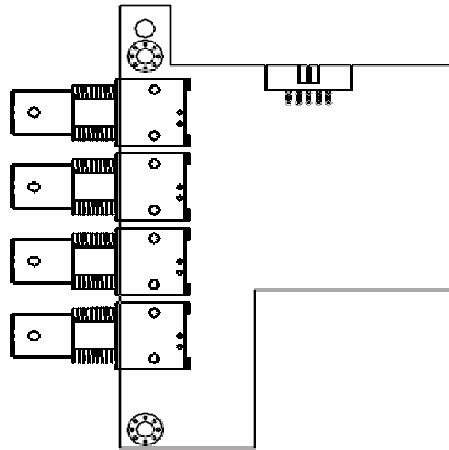

2.1.2.2 RTV-24 Connectors & Pin Definitions


Channel Extension Video Input (J11)



PIN NO.	Function	PIN NO.	Function
1	GND	2	CH4 video in
3	CH5 video in	4	GND
5	GND	6	CH6 video in
7	CH7 video in	8	GND
9	GND	10	GND

2.1.3 RTV-I4 Isolation GPIO board of RTV-24

2.1.3.1 RTV-I4 PCB Outline Drawing

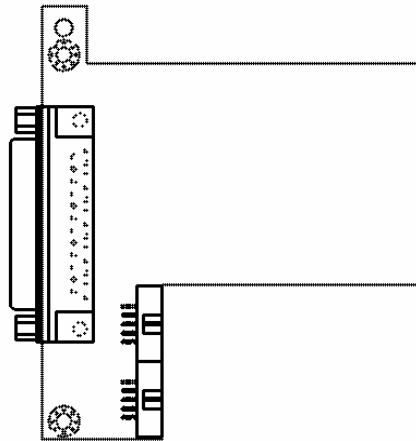

2.1.3.2 RTV-24 Connectors & Pin Definitions

a. Relay output signal select:



Relay output types: Normal open or Normal closed

Signal names: RY1, RY2, RY3, RY4

Jumper addresses J5, J6, J7, J8

Type select: Normal open: 2-3

Normal close: 1-2

Normal Open	Normal Closed
 <p>Diagram showing a 3-pin jumper configuration for Normal Open. Pin 1 is on the left, pin 3 is on the right, and pin 2 is in the middle. A thick black line connects pins 2 and 3, indicating they are shorted together.</p>	 <p>Diagram showing a 3-pin jumper configuration for Normal Closed. Pin 1 is on the left, pin 3 is on the right, and pin 2 is in the middle. A thick black line connects pins 1 and 2, indicating they are shorted together.</p>