


15" Open Frame Display Monitor

IP65 certified



▲ **Close Frame Display Monitor**
15" Open Frame Display Monitor
with Optional Aluminum Bezel

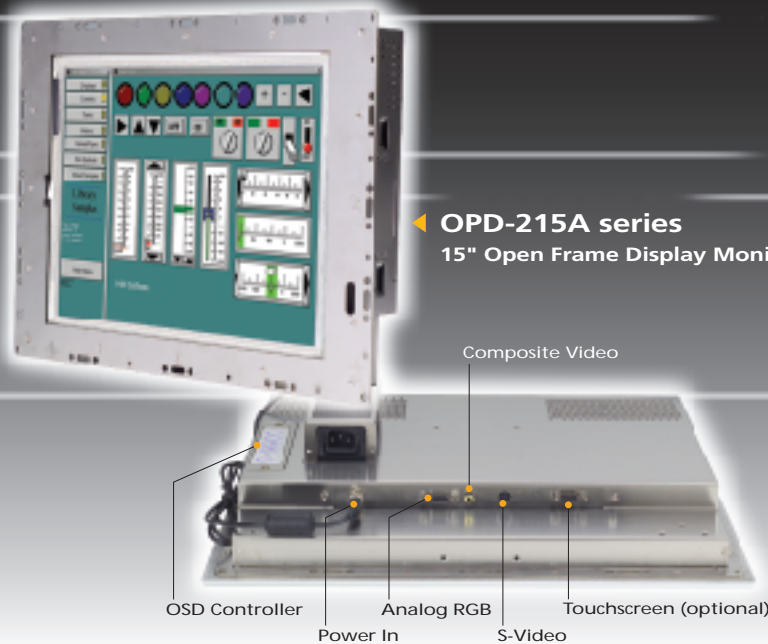

▶ **OPD-215A series**
15" Open Frame Display Monitor

Features

- 15" XGA color TFT LCD display
- Stainless steel open-frame architecture
- Front Panel with bezel is IP65 certified
- OSD (On Screen Display) function for display adjustment
- Strengthened glass protects the screen from shock damage
- Analog RGB signal directly input offering multi-scan function
- RGB, Composite video, S-Video signal selectable
- Picture-In-Picture function enable
- VESA 75mm standard screw holes
- Resistive touchscreen (optional)
- Aluminum front bezel (optional)

LCD Specifications

Model	OPD-215A
Display type	15" color TFT LCD
Max. resolution	1024 x 768
Max. colors	256K
Dot size(mm)	0.297 x 0.297
Luminance (cd/m²)	250 (TYP)
Viewing angle	160° (H)
	150° (V)
Operating temperature	0° ~ 45°C (32 ~ 113°F)
OSD	Yes
Back Light MTBF(Hrs)	30,000

Specifications

- **Construction** : Heavy-duty stainless steel chassis
- **Mounting** : Panel and Rear mount
Optional : Standard mount frame
Rack mount
Swivel ARM, Desk stand
- **Input signal** : RGB, Composite video, S-Video
- **Control** : OSD (On Screen Display) on rear panel
- **Power Supply** : External power adapter
- **OS support** : MS DOS, Windows 98/SE, Windows NT4.0, Windows 2000, Windows XP
- **Dimensions (W x H x D)** :
Without bezel : 428 x 320 x 53.3mm (16.9" x 12.6" x 2.1")
Standard bezel : 444 x 336 x 54.3mm (17.5" x 13.2" x 2.1")
Rack bezel : 483 x 354.8 x 54.3mm (19.0" x 14.0" x 2.1")
- **Carton Dimensions (W x H x D)** :
590 x 545 x 236mm (23.2" x 21.4" x 9.2")
- **Gross Weight** : 6.5 Kg (14.3 lbs)

Environmental Specifications

- **Operating temperature** : 0° to 45°C (32° ~ 113°F)
- **Storage temperature** : -20° to 60°C (-4° ~ 140°F)
- **Storage humidity** : 10 to 90% @ 40°C, non-condensing, without touchscreen
- **Vibration** : 5 ~ 500Hz, 1G random operation
- **Shock** : 15G peak acceleration (11 msec. duration)
- **EMC** : CE / FCC Class A

* UL safety certified model is also available.

Touchscreen (optional)

Type : 8-wire, analog resistive

Resolution : 1024 x 1024


Light transmission : 75%

Lifetime : 1 million activations

Controller : RS-232 interface



◀ New Power Module Mount on Rear Chassis




◀ Locking Power Connector




Dimension

OPD-215A

Unit:mm

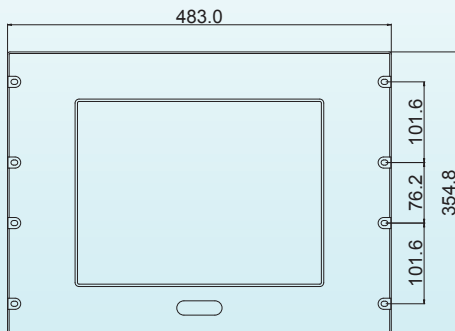

Front Bezel Size

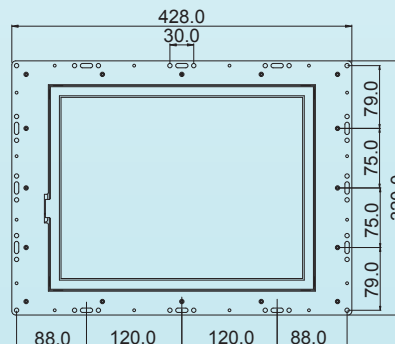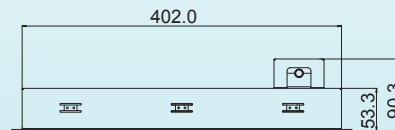

Cutout Size:405*299 mm

LCD Cutout Size:305.7*229.7mm