


IP102 IP Serial Device Server

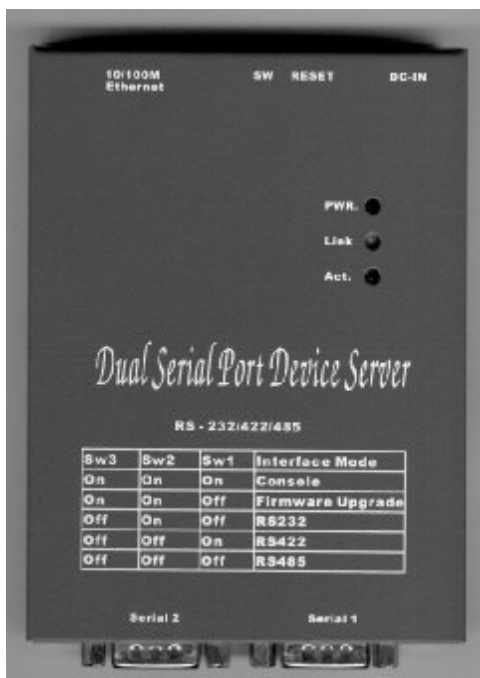

10/100Mbps LAN Connection

Support Two Serial Port

RS232/422/485 Serial Interface

- ☆ Auto-detecting 10/100Mbps Ethernet interface.
- ☆ DIP switch set serial port RS232/422/485 interface type.
- ☆ Support WIN95/98/Me virtual COM driver.
- ☆ Support WIN NT/2000/XP/2003 virtual COM driver.
- ☆ Support paired mode.
- ☆ Support Direct IP mode.
- ☆ Support Auto-Data-Direction-Control feature in RS485 interface.

IP102 IP Serial Device Server Specification:

LAN connection:

- ▲Interface: 10/100Mbps 100BaseT.
- ▲Connector: RJ45.

Software Compatibility:

- ▲TCP/IP or UDP/IP connection.
- ▲WIN95/98/Me virtual COM driver.
- ▲WIN NT virtual COM driver.
- ▲WIN2000/XP/2003 virtual COM driver.

Power Requirement:

- ▲12VDC @ 500ma.

Environment:

- ▲Operating temperature: 5°C~40°C.
- ▲Operating humidity: 10%~90%RH.
- ▲Storage temperature: 0°C~65°C.
- ▲Storage humidity: 5%~90%RH.

Serial Port:

- ▲Interface:
Serial 1 is RS232/422/485 set by DIP switch.
Serial 2 is RS232.
- ▲Connector: DB9 male.

Indicator capability:

- ▲PWR LED: power on indicator.
- ▲Link LED: LAN connection indicator.
- ▲Act LED: server active indicator.

Dimension:

- ▲1138 * 85 * 23 mm.

Other Relative Products:

- ØIP101 IP Serial Device Server: support 1 RS232/RS422/RS485 serial port.
- ØGPORT104 IP Serial Device Server: support 4 RS232 serial port.
- ØGPORT108 IP Serial Device Server: support 8 RS232 serial port.
- ØGPORT116 IP Serial Device Server: support 16 RS232 serial port.



RAYON TECHNOLOGY CO., LTD.

2F, No. 177, Chung_Shan 2 Rd., Lu_Chou city, Taipei Hsien, Taiwan.

TEL: 886-2-82858362 FAX: 886-2-82857065

E-Mail: rayon@ms1.hinet.net

WEB: <http://www.computex.com.tw/rayon>

WEB: <http://www.rayontech.com>