

STH-01ZB series ZigBee Wireless Temperature and Humidity Data Logger Sensor



Features & Benefits


- Wireless data transfer via ZigBee
- Analysis of data can be checked on STH-01ZB series or monitored on QuickView
- Easily check the data on the LCD screen by scrolling with the buttons on the device.
- Alarm sound if the temperature or humidity goes over the set limits.
- UART: Modbus RTU / ZigBee: HA profile

The STH-01ZB Series Temperature and Humidity Data Logger sensor is from the ZigBee Wireless family and can be installed into the ZigBee System network. The STH-01ZB series measures the air temperature and the relative humidity in the location. The STH-01ZB logs the data in its internal memory which is capable of 10,000 readings or the STH-01ZB series can transmit data wirelessly to a PC, Laptop or mobile phone (WZB-062/ WZB-06GP Gateway required). The User can monitor and analyze the data in our QuickView Software in real time. The versatility of the STH-01ZB series ZigBee Wireless Temperature and Humidity Data Logger reduces overhead, thus lowering R&D costs and reducing development schedules. The STH-01ZB series is suitable for homes, office buildings, schools, libraries, warehouses, museums, greenhouses, and etc.

Specifications

Sensing Type	Temperature and Humidity Data Logger Sensor	Power Consumption	40 mA, Alarm 80 mA at 12V
Sensing Range	Ambient	Transmit Interval	1 ~ 1000 minutes at intervals of 1 minute
Measurement Acc	Temperature +/-0.5°C / Humidity +/-5%	Network Topology	Star/ Tree/ Mesh
Transmitting Protocol	UART: Modbus RTU / ZigBee: HA profile	Power Supply	DC 5 - 24V / Battery Li 3.7V/2400mAh
Addressing	Set by Push Button	Operating Environment	-10 ~ +80°C, 0~100% RH (LCD readable To +70°C; battery endurable to +60 °C)
Wireless Protocol	IEEE 802.15.4, ZigBee2007/PRO	Dimensions	130(L) mm x 75(W) mm x 33(H) mm
Transmission Range	500 meters / 1600 feet (free space)	Weight	346g/12.2oz
Operating Frequency	2.4 GHZ ISM Band	Operating System	Windows 95/ 98/ NT/ 2000/ XP/ Vista/ Win7 / 8
RF Output Power	18 dBm	Certifications	CE/ FCC
Receiver Sensitivity	-92 dBm	Battery Life	5~10 days based on sending data per 1 min.

Application Solutions

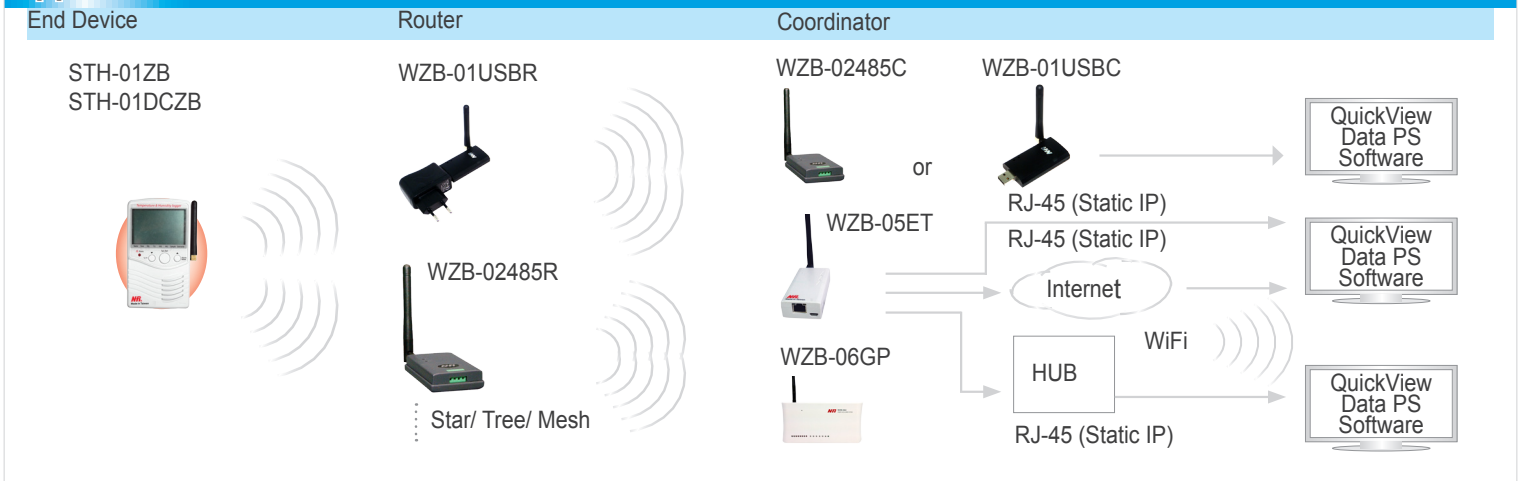

Ordering Code & Accessories

Solution	Ordering Code	Description	Solution	Ordering Code	Description
End Device	STH-01ZB STH-01DCZB	ZigBee Temperature and Humidity data logger	Coordinator	WZB-01USBC	ZigBee Wireless Coordinator
Router	WZB-02485R	ZigBee Wireless Router	Coordinator	WZB-02485C	ZigBee Wireless Coordinator
Router	WZB-01USBR	ZigBee Wireless Router	Coordinator	WZB-06GP	ZigBee Multi-Gateway (Coordinator)
			Coordinator	WZB-05ET	ZigBee Ethernet (Coordinator)



Nietzsche Enterprise Co., Ltd.
Tel: +886-2-2223-1118
4F., No.560, Sec. 2, ChungShan Rd., Chung Ho Dist., New Taipei City 235, Taiwan

Fax: +886-2-2223-5333

<http://www.nhr.com.tw/>
E-mail: service@nhr.com.tw