








#### Introduction

The **RGS-R9244GP+ series** which consist of **RGS-R9244+**, and **RGS-R9244GP+-E**, are rack-mount Ethernet switches with twenty-four 10/100/1000BaseT(X) Ethernet ports and four 1G/10G SFP+ ports. The device provides Layer 3 functions such as RIP, VRRP, and static routing for more efficient network management and higher security. The **RGS-R9244GP+-E** is an enhanced model with dual DC inputs and relay output. With complete support for Ethernet redundancy protocols such as O-Ring (recovery time < 30ms over 250 units of connection), O-Chain, MRP, Fast Recovery, and MSTP (RSTP/STP compatible), the switch can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. Featuring a wide operating temperature from -20°C to 60°C, the device can be managed centrally and conveniently via Open-Vision utility, web browsers, Telnet and console (CLI) configuration, making it to be one of the most reliable choice for highly-managed and Fiber Ethernet application.

#### Package Contents

Contents	Pictures	Number
RGS-R9244GP+ or RGS-R9244GP+-E		X 1
Console Cable		X 1
CD		X 1
QIG		X 1
Screw (M4 X6)		X 6
Rack-mounted kit (L&R)		X 1
Power cord		X 1

#### Preparation


Before you begin installing the switch, make sure you have all of the package contents available and a PC with Microsoft Internet Explorer 6.0 or later, for using web-based system management tools.

#### Safety & Warnings


- Elevated Operating Ambient:** If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (T<sub>ma</sub>) specified by the manufacturer.

- Reduced Air Flow:** Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
- Mechanical Loading:** Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.
- Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

#### Dimension

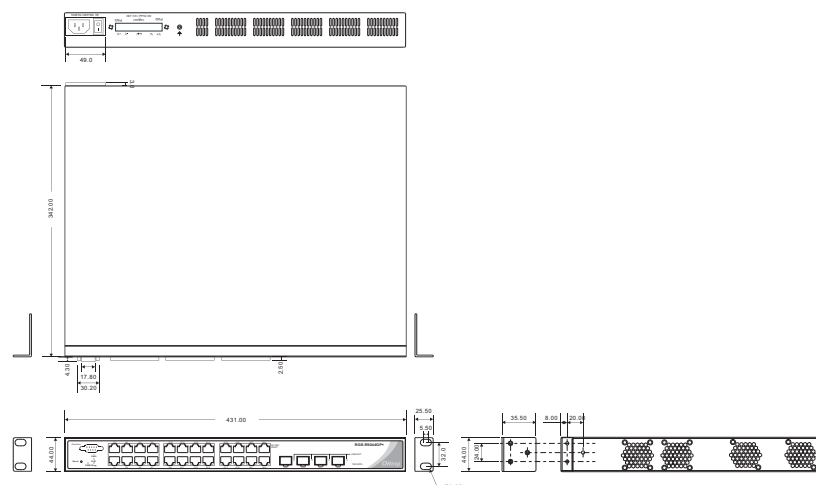

#### Panel Layouts

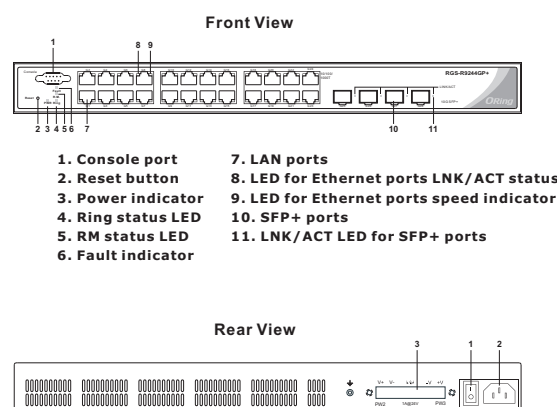


1. Console port
2. Reset button
3. Power indicator
4. Ring status LED
5. RM status LED
6. Fault indicator
7. LAN ports
8. LED for Ethernet ports LNK/ACT status
9. LED for Ethernet ports speed indicator
10. SFP+ ports
11. LNK/ACT LED for SFP+ ports

1. Power switch
2. AC power input (100V~240V / 50~60Hz)
3. Dual DC power inputs (RGS-R9244GP+-E Only)

#### Installation

##### Rack-mounting

- Step 1:** Install left and right front mounting brackets to the switch using three screws on each side.
- Step 2:** With front brackets orientated in front of the rack, fasten the brackets to the rack using two more screws.

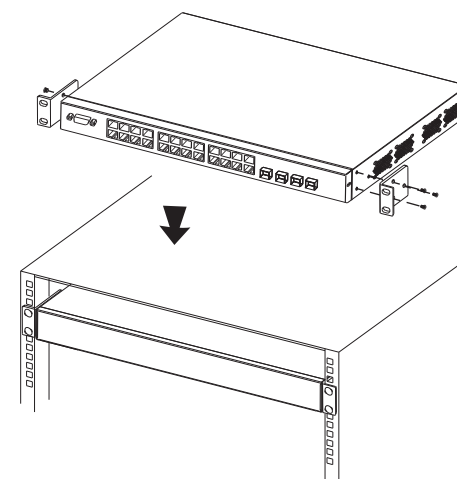

##### Network Connection

The series have standard Ethernet ports. According to the link type, the switch uses CAT 3, 4, 5, 5e UTP cables to connect to any other network devices (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable Types and Specifications:

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	RJ-45
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	RJ-45
1000BASE-T	Cat. 5 / Cat. 5e 100-ohm UTP	UTP 100 m (328 ft)	RJ-45

For pin assignments for different types of cables, please refer to the following tables.

1000Base-T RJ-45		10/100Base-T(X) RJ-45	
Pin Number	Assignment	Pin Number	Assignment
1	BI_DA+	1	TD+
2	BI_DA-	2	TD-
3	BI_DB+	3	RD+
4	BI_DC+	4	Not used
5	BI_DC-	5	Not used
6	BI_DB-	6	RD-
7	BI_DD+	7	Not used
8	BI_DD-	8	Not used


**Configurations**

After installing the switch and connecting cables, start the switch by turning on power. The green power LED should turn on.

**LED indication table**

LED	Color	Status	Description
<b>PWR</b>	Green	On	System power is connected
<b>R.M</b>	Green	On	Device is operating as a ring master
<b>Ring</b>	Green	On	Ring is enabled and device is running in Ring mode
		Blinking	Ring structure is broken
<b>Fault</b>	Amber	On	Errors (power failure or port malfunctioning)
10/100/1000Base-T(X) RJ45 port			
<b>LNK/ACT</b>	Green	On	Port is connected
		Blinking	Transmitting data
<b>Speed</b>	Green	Amber	Port is running at 100Mbps
		On	Port is running at 1000Mbps
		Off	Port is running at 10Mbps
1G/10G SFP+ port			
<b>LNK/ACT</b>	Green	On	Port is connected
		Blinking	Transmitting data

1. Launch the Internet Explorer and type in IP address of the switch. The default static IP address is **192.168.10.1**



2. Log in with default user name and password (both are **admin**). After logging in, you should see the following screen. For more information on configurations, please refer to the user manual. For information on operating the switch using ORing's Open-Vision management utility, please go to ORing website.



**Resetting**

To reboot the switch, press the **Reset** button for 5 seconds. To restore the switch configurations back to the factory defaults, press the **Reset** button for 10 seconds.

**Specifications**

ORing Switch Model	RGS-R9244GP+	RGS-R9244GP+-E
<b>Physical Ports</b>		
10/100/1000Base-T(X) with RJ45 Auto MDI/MDIX	24	
1G/10GBase-X with SFP+ port	4	
<b>Technology</b>		
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.2 for 1000Base-X	

Ethernet Standards	IEEE 802.3ab for 1000Base-T IEEE 802.3ae for 10Gigabit Ethernet IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)
MAC Table	32K
Priority Queues	8
Processing	Store-and-Forward
Switch Properties	Switch latency: 7 us Switch bandwidth: 128Gbps Max. Number of Available VLANs: 4095 VLAN ID Range: VID 1 to 4094 IGMP multicast groups: 128 for each VLAN Port rate limiting: User Define
Jumbo frame	Up to 10K Bytes
Security Features	Device Binding security feature Enable/disable ports, MAC based port security Port based network access control (802.1x) MAC-based authentication MAC address limit VLAN (802.1Q) to segregate a secure network traffic Radius centralized password management SNMPv3 encrypted authentication and access security Https / SSH enhance network security Web and CLI authentication and authorization IP source guard
Software Features	Hardware routing, RIP and static routing IEEE 802.1D Bridge, auto MAC address learning/aging and MAC address (static) Multiple Registration Protocol (MRP) MSTP (RSTP/STP compatible) Redundant Ring (O-Ring) with recovery time less than 30ms over 250 units TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging IGMP v2/v3 Snooping IP-based bandwidth management Application-based QoS management DOS/DDOS auto prevention Port configuration, status, statistics, monitoring, security DHCP Server/Client DHCP Relay Modbus TCP DNS client proxy SMTP Client NTP server
Network Redundancy	O-Ring, O-Chain, MRP, MSTP (RST/STP compatible), Fast Recovery
RS-232 Serial Console Port	RS-232 in DB-9 connector with console cable. 115200bps, 8, N, 1
<b>Fault Contact</b>	
Relay	None Present
<b>Power</b>	
Power input	100~240VAC with power socket 100~240VAC with power socket, dual 36~72VDC power input
Power consumption (Typ.)	37.4 Watts 37.4 Watts
Overload current protection	Present
<b>Physical Characteristic</b>	
Enclosure	19 inches rack mountable
Dimension (W x D x H)	431 (W) x 342 (D) x 44 (H) mm (16.97 x 13.47 x 1.73 inches)
Weight (g)	4597g 4754g
<b>MTBF (mean time between failures)</b>	
Time	462,867hrs 371,822hrs
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-20 to 60°C (-4 to 140°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory Approvals</b>	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD) EN61000-4-3 (RS) EN61000-4-4 (EFT) EN61000-4-5 (Surge) EN61000-4-6 (CS) EN61000-4-8 EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Warranty	5 years

1000Base-T MDI/MDI-X		
Pin Number	MDI port	MDI-X port
1	BI_DA+	BI_DB+
2	BI_DA-	BI_DB-
3	BI_DB+	BI_DA+
4	BI_DC+	BI_DD+
5	BI_DC-	BI_DD-
6	BI_DB-	BI_DA-
7	BI_DD+	BI_DC+
8	BI_DD-	BI_DC-

10/100Base-T(X) MDI/MDI-X		
Pin Number	MDI port	MDI-X port
1	TD+(transmit)	RD+(receive)
2	TD-(transmit)	RD-(receive)
3	RD+(receive)	TD+(transmit)
4	Not used	Not used
5	Not used	Not used
6	RD-(receive)	TD-(transmit)
7	Not used	Not used
8	Not used	Not used

Note: "+" and "-" signs represent the polarity of the wires that make up each wire pair.

**Console Port Pin Definition**

To connect the console port to an external management device, you need an DB-9 cable, which is also supplied in the package. Below is the console port pin assignment information.

PC RS-232 to DB9 (male) pin assignment	RS-232 with DB9 (female) pin assignment
PIN#2 RxD	PIN#2 RxD
PIN#3 TxD	PIN#3 TxD
PIN#5 GND	PIN#5 GND


**Wiring**

**AC Power Connection**

Both RGS-R9244GP+ and RGS-R9244GP+-E can be powered by AC electricity. Simply insert the AC power cable to the power connector at the back of the switch and turn on the power switch. The input voltage is 100V~240V/50~60Hz.

**DC Power Connection**

The RGS-R9244GP+-E supports dual DC power supplies, Power Supply 2 (PWR2) and Power Supply 3 (PWR3). The connections for PWR1, PWR2 and the RELAY are located on the terminal block. The input voltage is 36V~72VDC.



**STEP 1:** Insert the negative/positive wires into the V-/V+ terminals, respectively.  
**STEP 2:** To keep the DC wires from pulling loose, use a small flat-blade screwdriver to tighten the wire-clamp screws on the front of the terminal block connector.

**Relay contact**

The RGS-R9244GP+-E provides two sets of relay contacts on the 6-pin terminal block to detect user-configured events. The two wires attached to the fault contacts form an open circuit when a user-configured when an event is triggered. If a user-configured event does not occur, the fault circuit remains closed.

**Grounding**

Grounding and wire routing to help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the ground screws to the grounding surface prior to connecting devices.

**ORing**  
Copyright© 2015 ORing  
All rights reserved.

ROHS FC CE

**ORing Industrial Networking Corp.**  
TEL: +886-2-2218-1066 Website: www.oring-networking.com  
FAX: +886-2-2218-1014 E-mail: support@oring-networking.com