

Quick Installation Guide

TRGPS-9084GT-M12X-BP2-MV






EN50155 Rack-mount managed
Gigabit PoE Ethernet switch

Introduction

TRGPS-9084GT-M12X-BP2-MV is a managed Gigabit Ethernet switch with 8 Gigabit PoE-enabled ports and 4 Gigabit non-PoE ports in M12 connector. The non-PoE ports act as two sets of bypass ports to ensure constant network connectivity when power outage or node failure occurs. The switch supports various Ethernet redundancy protocols such as O-Ring, O-Chain and MSTP (RSTP/STP compatible) to protect your mission-critical applications from network interruptions or temporary malfunctions. With EN50155 compliance and M12 connectors, the device is a perfect choice for rolling stock applications.

Package Contents





The device is shipped with the following items. If any of these items is missing or damaged, please contact your customer service representative for assistance.

Contents	Pictures	Number
TRGPS-9084GT-M12X-BP2-MV		1
Console Cable		1
Rack-mounted kit (L&R)		1
CD		1
QIG		1


Preparation

Before you begin installing the device, make sure you have all of the package contents available and a PC with Microsoft Internet Explorer 6.0 or later, for using web-based system management tools.


Safety & Warnings

-  **Elevated Operating Ambient:** If installed in a closed environment, make sure the operating ambient temperature is compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer.
-  **Reduced Air Flow:** Make sure the amount of air flow required for safe operation of the equipment is not compromised during installation.
-  **Mechanical Loading:** Make sure the mounting of the equipment is not in a hazardous condition due to uneven mechanical loading.
-  **Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

Dimension

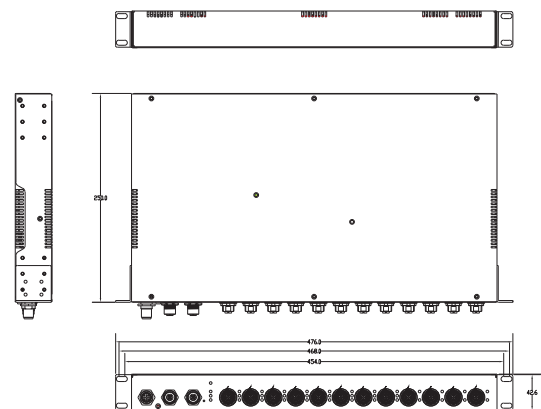

Panel Layouts

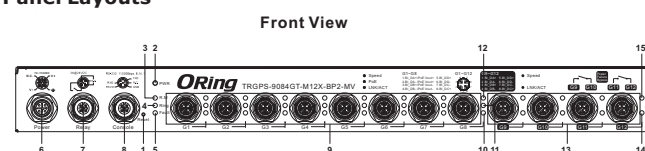


1. Reset button
2. Power status LED
3. R.M. status LED
4. Ring status LED
5. Fault LED
6. Power connector
7. Relay output port
8. Console port
9. PoE-enabled Gigabit Ethernet ports
10. Link/ACT LED for PoE-enabled Gigabit ports
11. PoE indicator for PoE-enabled Gigabit ports
12. Speed LED for PoE-enabled Gigabit ports
13. Non-PoE Gigabit Ethernet ports with bypass
14. Link/ACT LED for non-PoE Gigabit ports
15. Speed LED for non-PoE Gigabit ports

Installation

Rack-mounting

- Step 1:** Install left and right front mounting brackets to the switch using 4 M3 screws on each side provided with switch.
- Step 2:** With front brackets orientated in front of the rack, nest front and rear brackets together. Fasten together using remaining M4 screws into counter sunk holes.
- Step 3:** Fasten the front mounting bracket to the front of the rack.

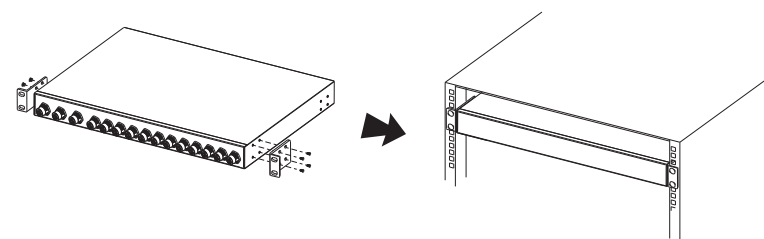

Wiring

For pin assignments of power, console and relay output ports, please refer to the following tables.

Grounding

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the grounding pin on the power connector to the grounding surface prior to connecting devices.

Power port pinouts

The device supports two sets of power supplies and uses the M12 S-coded 5-pin female connector on the front panel for dual power inputs.

Step 1: Insert a power cable to the power connector on the device.
Step 2: Rotate the outer ring of the cable connector until a snug fit is achieved. Make sure the connection is tight.



Console port pinouts



Relay output port pinouts

The switch uses the M12 A-coded 5-pin female connector on the front panel for relay output. Use a cable with an M12 A-coded 5-pin male connector to connect the relay. The relay contacts will detect user-configured events and form an close circuit when an event is triggered.



Network Connection

The switch has eight 10/100/1000Base-T(X) PoE and four 10/100/1000Base-T(X) non-PoE Ethernet ports in the form of M12 connector. Depending on the link type, the switch uses CAT 3, 4, 5, 5e UTP cables to connect to network devices (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	8-pin female M12 X-coding connector
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	8-pin female M12 X-coding connector
1000BASE-T	Cat. 5/Cat. 5e 100-ohm UTP	UTP 100 m (328 ft)	8-pin female M12 X-coding connector

For pin assignments of the Ethernet ports, please refer to the following tables.



10/100/1000Base-T(X) M12 X-coding	
Pin No.	Pin Definition
#1	BI_DA+
#2	BI_DA-
#3	BI_DB+
#4	BI_DB-
#5	BI_DD+
#6	BI_DD-
#7	BI_DC-
#8	BI_DC+

10/100/1000Base-T(X) P.S.E. M12 X-coding	
Pin No.	Pin Definition
#1	BI_DA+ with PoE Vout+
#2	BI_DA- with PoE Vout+
#3	BI_DB+ with PoE Vout-
#4	BI_DB- with PoE Vout-
#5	BI_DD+
#6	BI_DD-
#7	BI_DC-
#8	BI_DC+

Quick Installation Guide

TRGPS-9084GT-M12X-BP2-MV

EN50155 Rack-mount managed
Gigabit PoE Ethernet switch


Configurations

After installing the switch and connecting cables, the green power LED should turn on. Please refer to the following tablet for LED indication.

LED	Color	Status	Description
PWR	Green	On	DC power module activated
R.M	Green	On	Device operating in Ring Master mode
Ring	Green	On	Ring enabled
		Blinking	Ring structure is broken
Fault	Amber	On	Errors occur (i.e. power failure or port malfunctioning)
10/100/1000Base-T(X) P.S.E Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
PoE	Green	On	Power supplied over Ethernet
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps
10/100/1000Base-T(X) Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps

Follow the steps below to log in and access the system:

1. Launch the Internet Explorer and type in IP address of the device. The default static IP address is **192.168.10.1**



2. Log in with default user name and password (both are **admin**).

Please enter your user ID and password

ID	<input style="width: 95%;" type="text"/>	
Password	<input style="width: 95%;" type="password"/>	
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>		

3. After logging in, you should see the following screen. For more information on configurations, please refer to the user manual. For information on operating the device using ORing's Open-Vision management utility, please go to ORing website.

Information Message	
System	TRGPS-9084GT-M12X-BP2-MV
Name	EN50155 12-port managed Gigabit PoE Ethernet switch with 8x10/100/1000Base-T(X) P.S.E. and 4x10/100/1000Base-T(X), M12 connector and 2xbypass included
Description	
Location	
Contact	
OID	1.3.6.1.4.1.25972.100.6.5.281
Hardware	
MAC Address	00-16-94-03-a5-2b
Time	
System Date	1970-01-01 00:24:20+00:00
System Uptime	0d 00:24:20
Software	
Kernel Version	v9.55
Software Version	v1.00
Software Date	2017-01-04T16:47:55+08:00
Auto-refresh <input type="checkbox"/> Refresh	
Enable Location Alert <input type="checkbox"/>	

Resetting

To restore the device configurations back to the factory defaults, press the **Reset** button for a few seconds. Once the power indicator starts to flash, release the button. The device will then reboot and return to factory defaults.

Specifications

ORing Switch Model	TRGPS-9084GT-M12X-BP2-MV
Physical Ports	
10/100/1000 Base-T(X) Ports in M12 Auto MDI/MDIX with P.S.E.	8 x M12 connector (8 pin X-coding)
10/100/1000Base-T(X) ports in M12	4 x M12 connector (8-pin X-coding)
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3at PoE specification
MAC Table	8K
Flash Memory	128Mbits
DRAM Size	1Gbits
Jumbo frame	Up to 9.6K Bytes
Priority Queues	8
Processing	Store-and-Forward
Switch Properties	Switching latency: 7 us Switching bandwidth: 24 Gbps Max. Number of Available VLANs: 4094 VLAN ID range: VID 1 to 4094 IGMP multicast groups: 128 for each VLAN Port rate limiting: User Define
Security Features	Device Binding security feature Enable/disable ports, MAC based port security Port based network access control (802.1x) MAC-based authentication (802.1x) VLAN (802.1Q) to segregate and secure network traffic Radius centralized password management SNMPv3 encrypted authentication and access security Https / SSH enhance network security Web and CLI authentication and authorization IP source guard
Software Features	IEEE 802.1D Bridge, auto MAC address learning/aging and MAC address (static) MSTP (RSTP/STP compatible) Redundant Ring (O-Ring) with recovery time less than 30ms TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging and GVRP supported Guest VLAN IGMP v2/v3 Snooping Application based QoS management DOS/DDOS auto prevention Port configuration, status, statistics, monitoring, security DHCP Server / Client support SMTP Client NTP server
Network Redundancy	O-Ring O-Chain MSTP (RSTP/STP compatible)
RS-232 Serial Console Port	RS-232 in 5-pin M12 connector with console cable. 115200bps, 8, N, 1
Fault Contact	
Relay	Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin M12 A-coding)
Power	
Redundant Input Power	72~110VDC on 4-pin S-coded M12 connector
PoE Output Power	61.6W
Power Consumption(Typ.)	20W (not include PoE output)
Overload Current Protection	Present
Reverse Polarity Protection	Present

Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	440 (W) x 325 (D) x 44 (H) mm (17.32x12.8x1.73 inch)
Weight (g)	4,550g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011)
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
MTBF	298,128 hours
Warranty	5 years